



INSTANT SHADE
UMBRELLAS



Eclipse[®] 2.0

Heavy Duty Cantilever Umbrella



3 YEAR
FRAME
WARRANTY



10 YEAR
FADE
WARRANTY



65 WIND
RATING
KM / H


instantshadeumbrellas.com.au

Find out more >



Eclipse[®] 2.0

Australia's Best Cantilever Umbrella

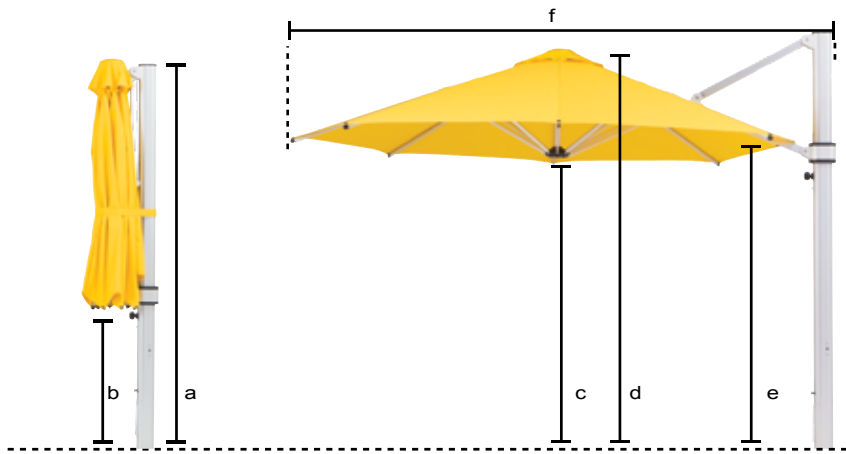


Standard Colours

Canopies are made of Premium 100% Solution Dyed Acrylic Canvas with a 10 year warranty against fading.**



Smoked
Tweed



Slate



Natural

Fabric colours may vary slightly from printed swatches shown above. Other colours available to order, surcharge may apply.

**10 year warranty is for residential use and relates to fading of the colour only

Frames

Frames are made of Marine Grade Anodised Aluminium with a 3 year warranty against mechanical defects.



HEAVY DUTY
EXTRUDED
ALUMINIUM MAST



INFINITY TILT
SYSTEM



SILENT CRANKING
SYSTEM



EXTRUDED ALUMINIUM
JOINTS

Dimensions

*All measurements are rounded and are subject to change.



3m sq



4m oct



3.5m sq



3m x 4m rect

Dimensions of closed umbrella

a: Mast height (cm)	283	283	283	283
b: Distance from arms to ground (cm)	68	80	34	34
Weight of umbrella when folded (kg)	35	37	37	37

Dimensions of open umbrella

c: Height to canopy hub (cm)	205	207	212	212
e: Height to edge of canopy (cm)	210	210	210	210
d: Total height to top of canopy (cm)	283	275	289	285
f: Distance from back of mast to front edge of canopy (cm)	329	405	375	329
Width of canopy (cm)	300	400	350	400

Packaging dimensions

Dimensions of cardboard packaging (cm)	295x51x30	295x51x30	295x51x30	295x51x30
Weight of umbrella when packaged in carton with spigot (kg)	49	51	51	51

Wind guidance*


Installed wind rating (km/h)	65	65	50	50
Freestanding base rating (km/h)	30	30	Install only	Install only

*The above wind speeds are provided as a guide only. Refer to our website and Product Owner Manual provided with the umbrella for more information. The product warranty does not cover wind damage regardless of wind speed.


Base and Installation options




Spigot included



In Ground Fitting - to be
concreted into ground



Base Plate 315mm ϕ - to
bolt to concrete patio or
wooden deck



880 Base with Aluminium Cover

